


PA6 (FLEXIBLE) Tubi in poliammide / Polyamide tubing



polimero termoplastico
thermoplastic polymer

applicazioni:
applications

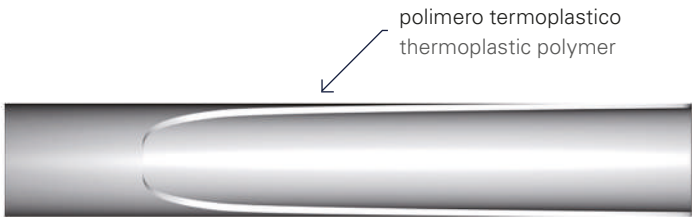

TIPO TYPE	Ø INTERNO INSIDE Ø	Ø ESTERNO OUTSIDE Ø	SCOPPIO (20°C) BURST (68°F)	ESERCIZIO (20°C) SERVICE (68°F)	RAGGIO MIN. CURV MIN. BEND RADIUS
PA.6 HIHL	(mm)	(mm)	(bar)	(bar)	(mm)
PA602000400	2	4	124	41	25
PA603000600	3	6	124	41	30
PA604000600	4	6	74	25	45
PA606000800	6	8	53	18	65
PA608001000	8	10	41	14	80
PA610001200	10	12	34	11	100

PRESSURE REDUCTION AT THE INCREASE OF THE TEMPERATURE					
0°C	+30°C	+40°C	+60°C	+80°C	+110°C
1	0,83	0,71	0,54	0,48	0,36

TOLLERANZA:
Da Ø esterno 4 mm a Ø esterno 10 mm +/- 0.15 mm. Da Ø esterno 10 mm a Ø esterno 15 mm +/- 0.20 mm - disponibili in vari colori: naturale, nero, arancio ed altri colori su richiesta

TOLLERANCES:
From ext. Ø 4 mm to ext Ø 10 mm +/- 0.15 mm. From ext. Ø 10 mm to ext. Ø 15 mm +/- 0.20 mm - available in different colorus: natural, black, orange and other colours on request

