



TUBI VAPORE IN PTFE - TWTB

PTFE STEAM HOSES - TWTB

Prodotti con le migliori tecniche di estrusione i nostri tubi in PTFE sono la giusta soluzione per tutte le applicazioni in presenza di vapore. Il rivestimento esterno in poliestere garantisce la sicurezza dell'operatore, ne permette l'isolamento termico e rende il tubo estremamente leggero.

Possiamo fornire i tubi completi di raccordi e molle di rinforzo che ne permettono un migliore utilizzo e prevengono eventuali cricature.

PRINCIPALI APPLICAZIONI

- Ferri da stiro a vapore
- Manichini a vapore
- Stirelle industriali
- Generatori di vapore

Produced with the best extrusion systems our PTFE hoses are the right choice for all applications with steam.

The external braid of polyester grants the safety of the operator, gives a good thermal insulation and light weight to the hose.

We can supply the hoses with fittings and springs that allows a better using and to prevent kink problems.

MAIN APPLICATIONS


- Steam hand irons
- Steam manikins
- Industrial ironing machines
- Steam generators

TWTB Tubi vapore in PTFE / PTFE steam hoses


PTFE / PTFE




applicazioni:
applications:




TUBI VAPORE IN PTFE CALZATI POLIESTERE - PTFE STEAM HOSES BRAIDED POLYESTER						
TIPO TYPE	Ø INTERNO / INSIDE Ø	SPESSORI PARETE / WALL TH	Ø ESTERNO / OUTSIDE Ø	RAGGIO MIN.CURV MIN. BEND RADIUS	SCOPPIO (20°C) BURST (68°F)	ESERCIZIO (20°C) SERVICE (68°F)
	(mm)	(mm)	(mm)	(mm)	(bar)	(bar)
TWTB	3.5	1.00	7.00	25	130	35
TWTB	5	1.00	8.00	30	120	30
TWTB	6	1.00	9.00	35	100	25

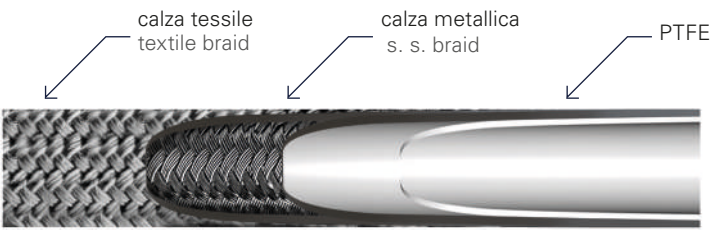

applicazioni:
applications:

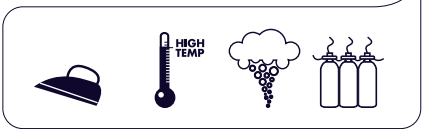

TUBI VAPORE FHL CALZATI IN AISI 304 E FIBRA IN POLIESTERE - FHL PTFE STEAM HOSES BRAIDED AISI 304 AND POLYESTER FIBER									
TIPO TYPE	DN		SPESSORI PARETE WALL TH	Ø INTERNO / INSIDE Ø	Ø ESTERNO / OUTSIDE Ø	PESI / WEIGHTS	ESERCIZIO (20°C) SERVICE (68°F)	SCOPPIO (20°C) BURST (68°F)	RAGGIO MIN.CURV MIN. BEND RADIUS
	(mm)	(inches)	(mm)	(mm)	(mm)	(gr/mt)	(bar)	(bar)	(mm)
TWTB	5	3/16"	0.7	4.8	8.4	69	200	800	35
TWTB	6	1/4"	0.7	6.35	9.9	8.7	175	700	45
TWTB	8	5/16"	0.7	8	11.9	126	150	600	50
TWTB	9	3/8"	0.7	9.5	13.4	145	135	540	55
TWTB	10	13/32"	0.7	10.35	14.3	158	130	520	65

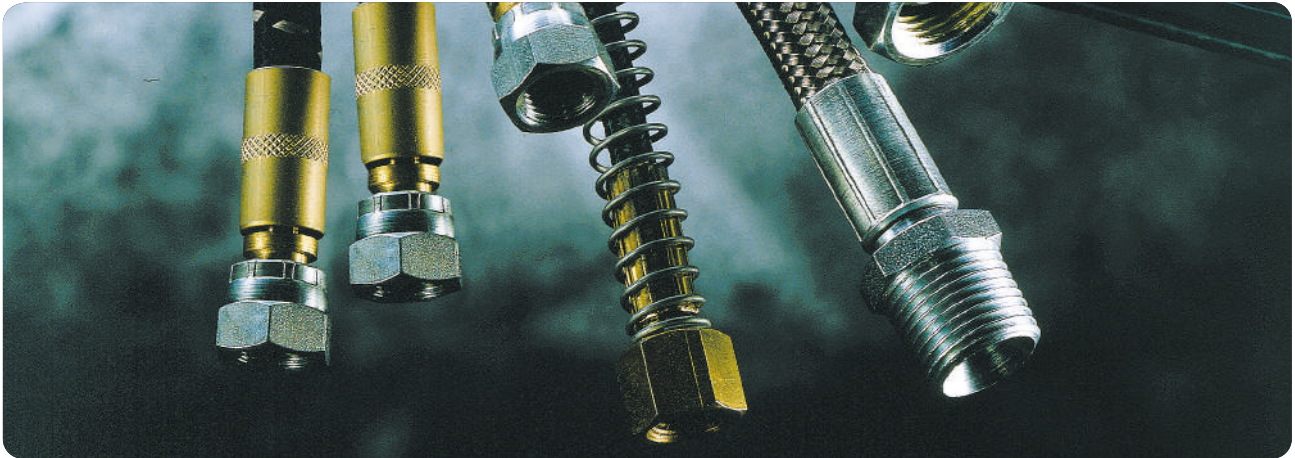

SEGNALIAMO LA DISPONIBILITÀ DI RIVESTIRE IN TRECCIA TESSILE ANCHE TUBI IN SILICONE EPDM
WE CAN COVER THE HOSE WITH TEXTILE BRAID, SILICONE AND EPDM